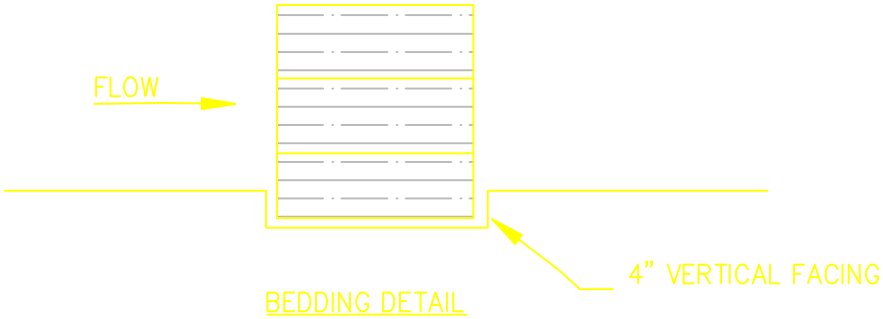

BEDDING DETAIL

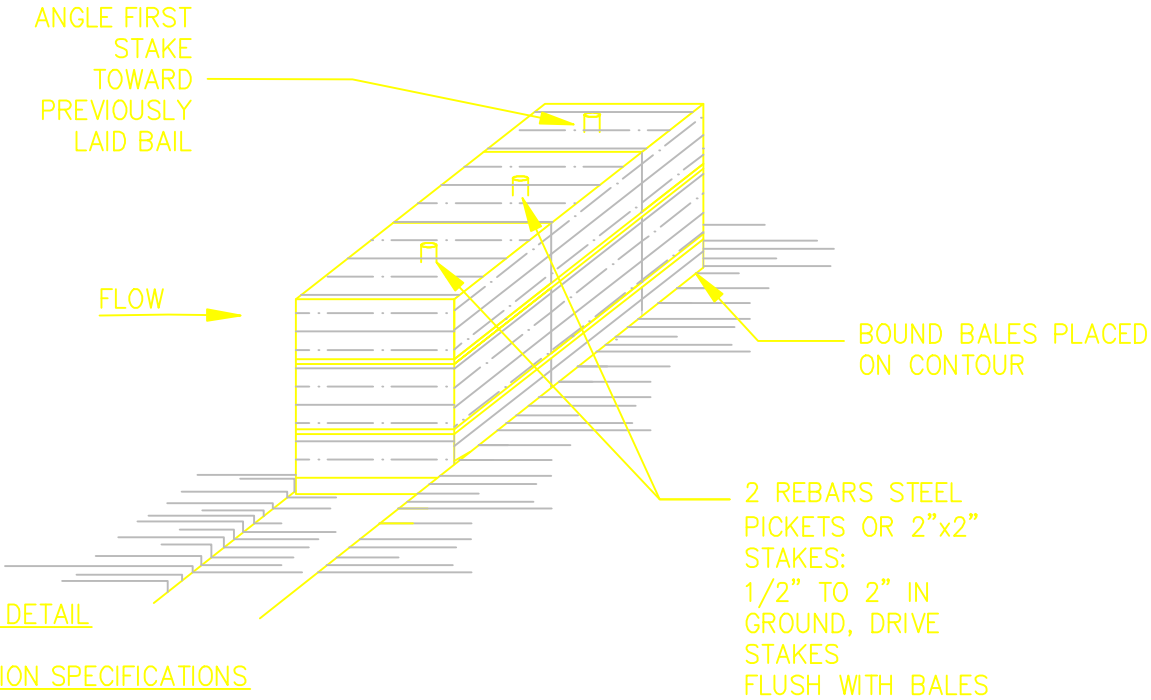

ANCHORING DETAIL

CONSTRUCTION SPECIFICATIONS

1. BALES SHALL BE PLACED AT THE TOE OF A SLOPE OR ON THE CONTOUR AND IN A ROW THAT ENDS TIGHTLY ABUTTING THE ADJACENT BALES.

2. EACH BALE SHALL BE EMBEDDED IN THE SOIL A MINIMUM OF 4 INCHES AND PLACED SO BINDINGS ARE HORIZONTAL.

3. BALES SHALL BE SECURELY ANCHORED IN PLACE BY EITHER TWO STAKES OR RE-BARS DRIVEN THROUGH THE BALE. THE FIRST STAKE SHALL BE DRIVEN TOWARD THE PREVIOUSLY LAID BALE AT AN ANGLE TO FORCR THE BALES TOGETHER. STAKES SHALL BE DRIVEN FLUSH WITH THE BALES.

4. BALES SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFULNESS.

HUNTINGTON STORMWATER UTILITY DEVELOPMENT MANUAL

EROSION AND SEDIMENT CONTROL DETAILS		
STRAW DAM		
SCALE: NONE	DATE: JAN. 2005	DWG. NO. EC-5